	<h1>Product Specification</h1>
<b>Model:</b> ISTO-P1640H12TR	<b>RoHS</b>
<b>Revision:</b> original version	<b>Effective Date:</b> 2016-08-16
<b>Customer:</b>	<b>Page 1 of 6</b>

## Content

	page
Revision .....	1
1 Applications.....	1
2 Features.....	1
3 Technical Specifications.....	1
4 Mechanical Drawing .....	2
5 Beam Pattern .....	2
6 Test Circuit .....	3
7 Reliability Test.....	4
8 Caution in Use.....	5
9 Note.....	5
10 Packaging Details.....	6

## Revision

The first version.

## 1 Applications

Mainly used for ultrasonic ranging, smoke detector, parking system, robot R&D, liquid level measurement and so on.

## 2 Features

- 2.1 Dual Use:Transmitter/Receiver
- 2.2 Compact and light weight.
- 2.3 High sensitivity and sound pressure
- 2.4 Less power consumption
- 2.5 High reliability



## 3 Technical Specifications



# Product Specification

Model: ISTO-P1640H12TR

RoHS

Revision: original version

Effective Date: 2016-08-16


Customer:

Page 2 of 6

Item	Value
Using method	Transmitter/Receiver
Nominal Frequency	40±1.0KHZ
Sensitivity	≥-68dB
S P L	≥115dB(10V/30cm/sine wave)
Directivity	80deg
Capacitance	2400pF±20%@1KHz
Detectable range	0.2~18m
Allowable input voltage	120Vp-p(40KHz)
Operating Temperature	-20~ +70℃
Ringing	Max 2.8ms
Housing material	Plastic
Weight	2.0g

## 3 Mechanical Drawing

unit: mm

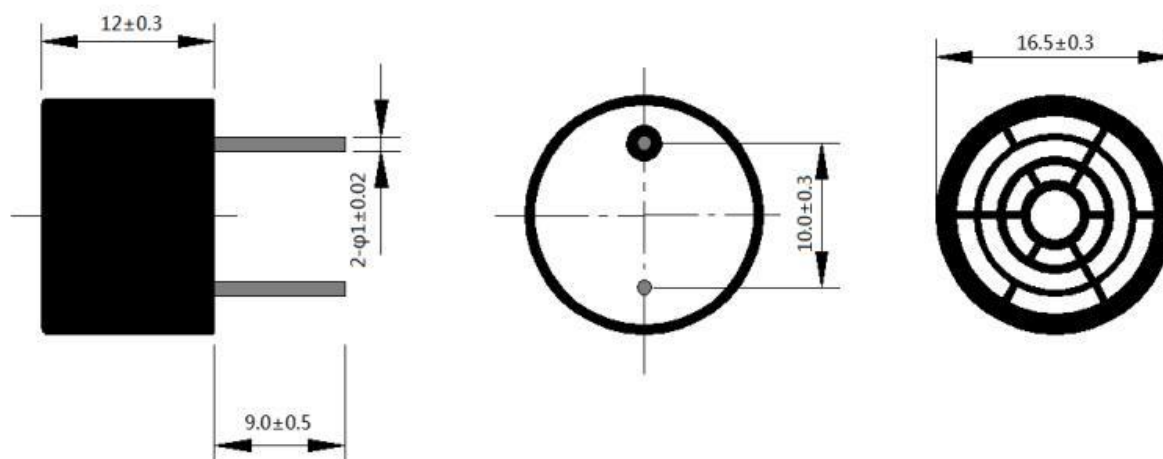

## 5 Beam Pattern



## Product Specification

Model: ISTO-P1640H12TR



RoHS

Revision: original version


Effective Date: 2016-08-16

Customer:


Page 3 of 6

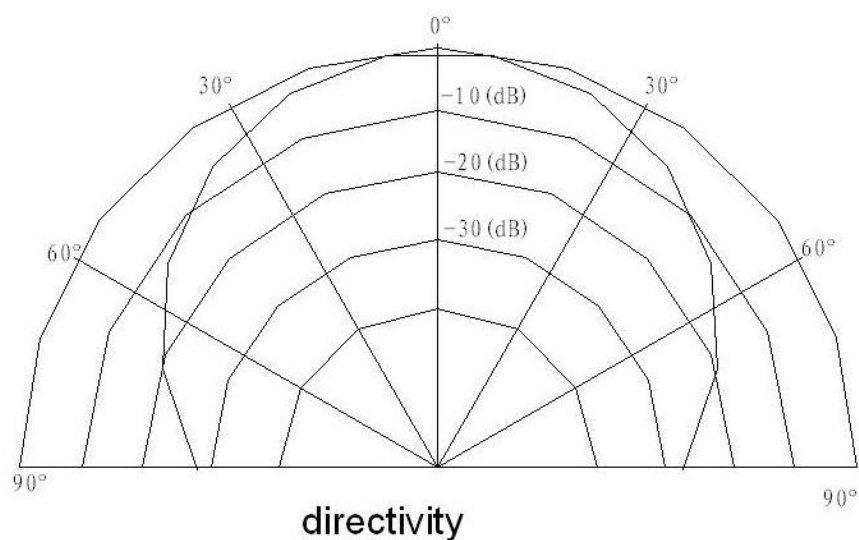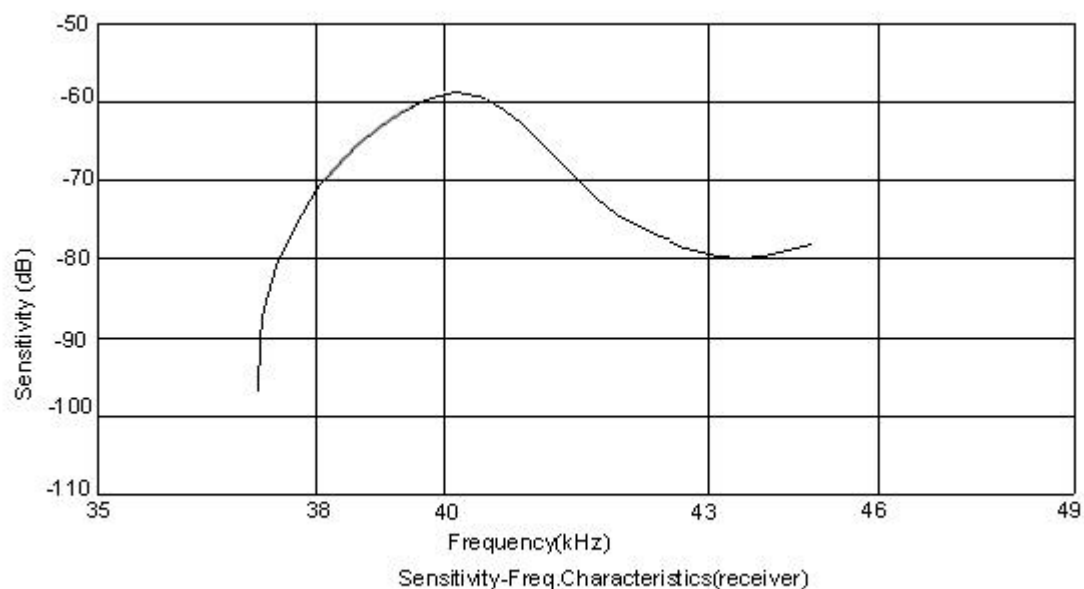

## 6 Test Circuit

	<h1>Product Specification</h1>
<b>Model:</b> ISTO-P1640H12TR	<b>RoHS</b>
<b>Revision:</b> original version	<b>Effective Date:</b> 2016-08-16
<b>Customer:</b>	<b>Page 4 of 6</b>

## Receiver

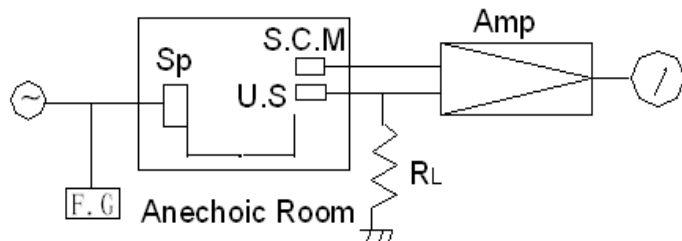

RL: 3.9K $\Omega$

U.S. :Ultrasonic Sensor

S.C.M:Standard Cappacitor Microphone


Amp. :Amplifier

OSC. :Oscillator

Sp :Tweeter

F.C. :Frequency Counter

## Transmitter

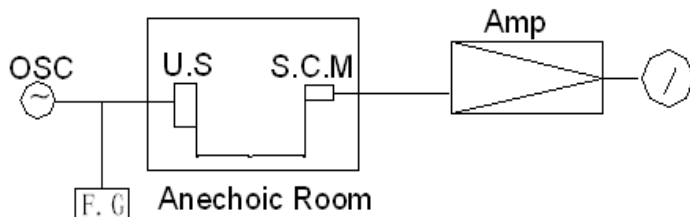

U.S. :Ultrasonic Sensor

S.C.M:Standard Cappacitor Microphone


Amp. :Amplifier

Input voltage:10Vrms

F.C. :Frequency Counter

## 7 Reliability Test

7.1 High Temp. Life Test	+85 $\pm$ 3 $^{\circ}$ C
Temperature	100 hrs
Duration	
7.2 Low Temp. Life Test	-40 $\pm$ 3 $^{\circ}$ C
Temperature	100 hrs
Duration	
7.3 Heat Cycle Test	+85 $\pm$ 3 $^{\circ}$ C 1hour
Temperature	-40 $\pm$ 3 $^{\circ}$ C 1hour
Cycles	10 cycles
7.4 Humidity Test	+60 $\pm$ 2 $^{\circ}$ C
Temperature	90~95%
Relative Humidity	100 hrs
Duration	
7.5 Vibration Test	10~55Hz
Vibration Frequency	1.5 min
Sweep Period	x,y&z
Direction	

	<h1>Product Specification</h1>
<b>Model:</b> ISTO-P1640H12TR	<b>RoHS</b>
<b>Revision:</b> original version	<b>Effective Date:</b> 2016-08-16
<b>Customer:</b>	<b>Page 5 of 6</b>

---

Time	2 hours/direction
7.6 Shock Test	
Acceleration	sine 100G
Direction	x,y&z
Shock Time	3 times/direction
7.7 Drop Test	
Height	1 m on concrete floor
Times	2 times

7.8 Connector Soldering Check:  
 Immersing terminal up to 1mm below in soldering bath at 260℃ 10  
 Seconds.

Notice:


The variation of the S.P.L or the sensitivity at 40KHz is within 2dB  
 compared with initial figures at 25℃ in 24 hours after above test conditions.

## 8 Caution in Use

- 8.1 Please avoid applying an excessive stress to the transducer because it might be damaged.
- 8.2 The transducer may generate surge voltage by mechanical or thermal shock. Care should be taken to protect from it in designing your application circuit.
- 8.3 Please do not apply DC voltage to the transducer.
- 8.4 Please do not use the transducer in water.
- 8.5 The piece of sensor may be damaged by force pressure from back of sensor.
- 8.6 Please well evaluate the painting and electrical characteristic for your coating.
- 8.7 When used to distinguish between positive and negative.

## 9 Note

- 9.1 please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- 9.2 You are requested not to use our product deviating from the agreed specifications.
- 9.3 We consider it not appropriate to include any terms and conditions with regard to the business transaction in the product specifications, drawings or other technical documents.

	<h1>Product Specification</h1>
<b>Model:</b> ISTO-P1640H12TR	<b>RoHS</b>
<b>Revision:</b> original version	<b>Effective Date:</b> 2016-08-16
<b>Customer:</b>	<b>Page 6 of 6</b>

## 10 Packaging Details

