	<h1>Product Specification</h1>
Model: ISTO-A1240H09R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 1 of 6

Content

	page
Revision	1
1 Applications.....	1
2 Features.....	1
3 Technical Specifications.....	1
4 Mechanical Drawing	2
5 Beam Pattern	2
6 Test Circuit	4
7 Reliability Test.....	4
8 Caution in Use.....	5
9 Note.....	5
10 Packaging Details.....	6

Revision

The first version.

1 Applications

Mainly used for ultrasonic ranging, smoke detector, parking system, robot R&D, liquid level measurement and so on.

2 Features

- 2.1 Receiver: "R" mark on housing
- 2.2 Compact and light weight
- 2.3 High sensitivity
- 2.4 Less power consumption
- 2.5 High reliability



3 Technical Specifications



Product Specification

Model: ISTO-A1240H09R

RoHS

Revision: original version

Effective Date: 2016-08-16


Customer:

Page 2 of 6

Item	Value
Using method	Receiver
Nominal Frequency	40±1.0KHZ
Sensitivity	≥-70dBV/μMbar
Directivity	75deg
Capacitance	2400±25%@1KHz
Detectable range	0.2~18m
Operating Temperature	-30~ +85°C
Housing material	Aluminum
Weight	1.58g

4 Mechanical Drawing

units:mm

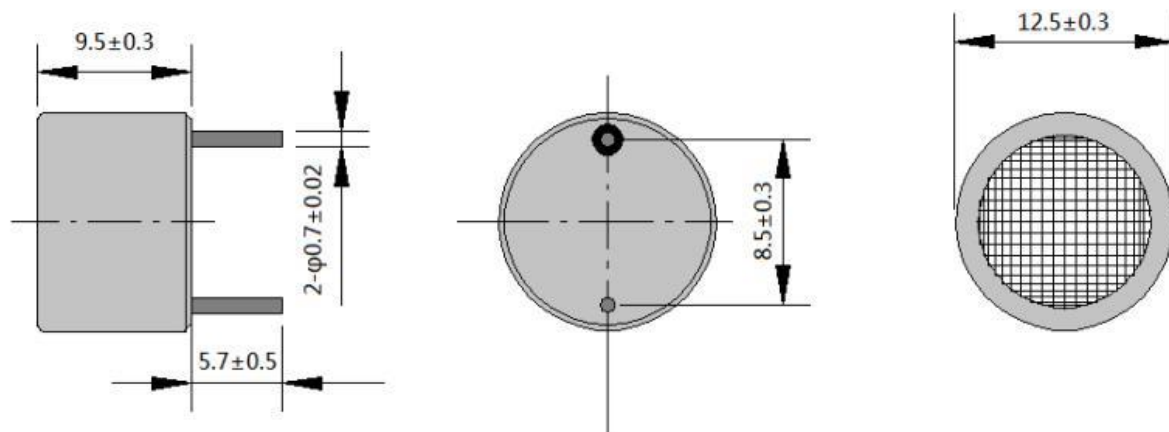

5 Beam Pattern



Product Specification

Model: ISTO-A1240H09R


RoHS

Revision: original version


Effective Date: 2016-08-16

Customer:


Page 3 of 6

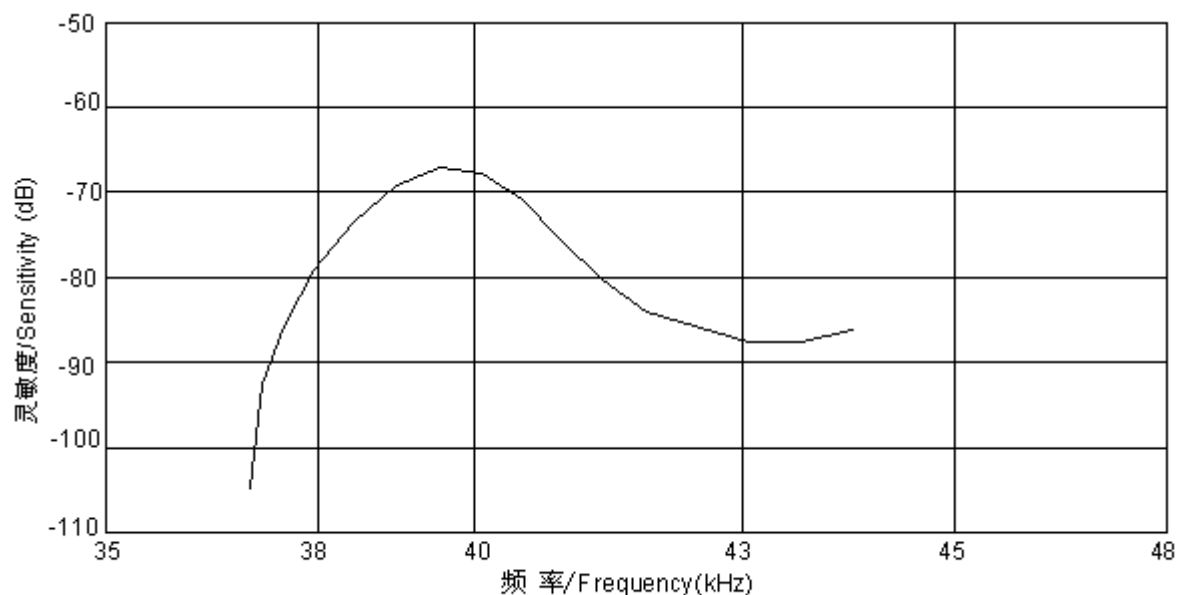


灵敏度-频率特性图/SPL-Frequency Characteristics

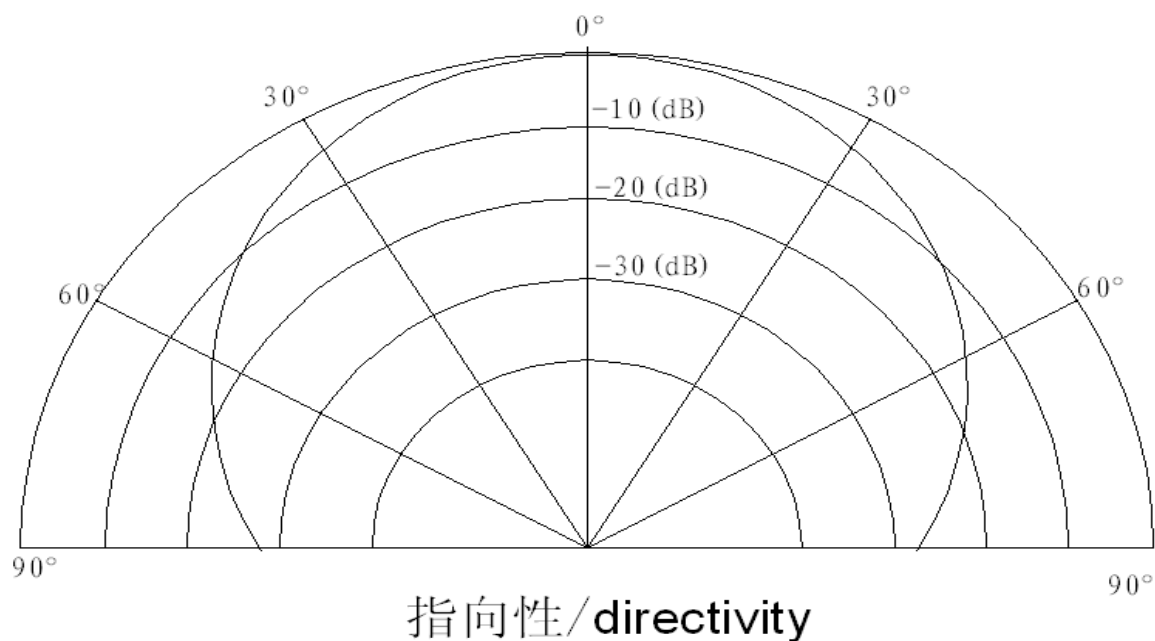

指向性/directivity

	<h1>Product Specification</h1>
Model: ISTO-A1240H09R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 4 of 6

6 Test Circuit

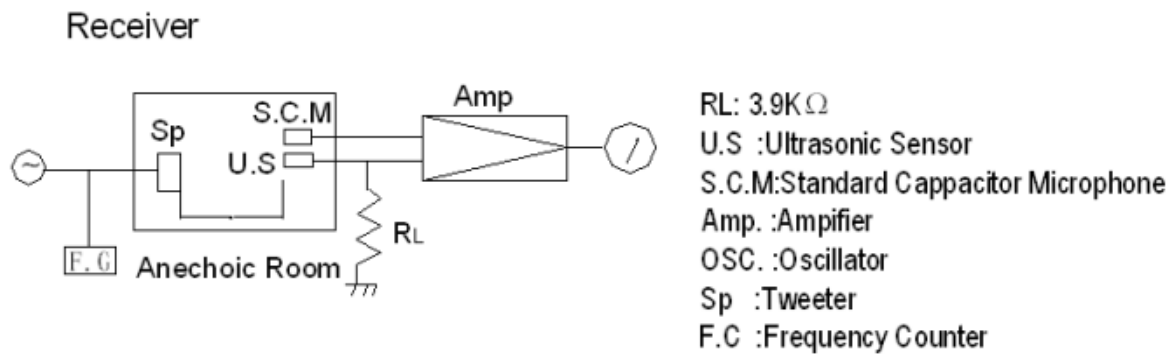

7 Reliability Test

7.1 High Temp. Life Test	
Temperature	$+85\pm 3^{\circ}\text{C}$
Duration	100 hrs
7.2 Low Temp. Life Test	
Temperature	$-40\pm 3^{\circ}\text{C}$
Duration	100 hrs
7.3 Heat Cycle Test	
Temperature	$+85\pm 3^{\circ}\text{C}$ 1hour
	$-40\pm 3^{\circ}\text{C}$ 1hour
Cycles	10 cycles
7.4 Humidity Test	
Temperature	$+60\pm 2^{\circ}\text{C}$
Relative Humidity	90~95%
Duration	100 hrs
7.5 Vibration Test	
Vibration Frequency	10~55Hz
Sweep Period	1.5 min
Direction	x,y&z
Time	2 hours/direction
7.6 Shock Test	
Acceleration	sine 100G
Direction	x,y&z
Shock Time	3 times/direction
7.7 Drop Test	
Height	1 m on concrete floor
Times	2 times



Product Specification

Model: ISTO-A1240H09R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 5 of 6

7.8 Connector Soldering Check:

Immersing terminal up to 1mm below in soldering bath at 260°C 10 Seconds.

Notice:

The variation of the sensitivity at 40KHz is within 2dB compared with initial figures at 25°C in 24 hours after above test conditions.

8 Caution in Use

8.1 Please avoid applying an excessive stress to the transducer because it might be damaged.

8.2 The transducer may generate surge voltage by mechanical or thermal shock. Care should be taken to protect from it in designing your application circuit.

8.3 Please do not apply DC voltage to the transducer.

8.4 Please do not use the transducer in water.

8.5 The piece of sensor may be damaged by force pressure from back of sensor.

8.6 Please well evaluate the painting and electrical characteristic for your coating.


8.7 When used to distinguish between positive and negative.

9 Note

9.1 Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.

9.2 You are requested not to use our product deviating from the agreed specifications.

9.3 We consider it not appropriate to include any terms and conditions with regard to the business transaction in the product specifications, drawings or other technical documents.

	<h1>Product Specification</h1>
Model: ISTO-A1240H09R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 6 of 6

10 Packaging Details

