	<h1>Product Specification</h1>
Model: ISTO-A1625H12R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 1 of 6

Content

	page
Revision	1
1 Applications.....	1
2 Features.....	1
3 Technical Specifications.....	1
4 Mechanical Drawing	2
5 Beam Pattern	2
6 Test Circuit	3
7 Reliability Test.....	4
8 Caution in Use.....	4
9 Note.....	5
10 Packaging Details.....	6

Revision

The first version.

1 Applications

Mainly used for ultrasonic ranging, smoke detector, parking system, robot R&D, liquid level measurement and so on.

2 Features

- 2.1 Receiver: "R" mark on housing
- 2.2 Compact and light weight
- 2.3 High sensitivity
- 2.4 Less power consumption
- 2.5 High reliability



3 Technical Specifications



Product Specification

Model: ISTO-A1625H12R

RoHS

Revision: original version

Effective Date: 2016-08-16


Customer:

Page 2 of 6

Item	Value
Using method	Receiver
Center frequency	25±1KHz
Sensitivity for receiver	≥-65dBV/μMbar
Directivity	80deg
Capacitance	2600pF±20%@1KHz
Operating temperature	-30 to +85°C
Measure distance	0.2~12m
Metals of case	Aluminum
Weight	2.31g

4 Mechanical Drawing

units:mm

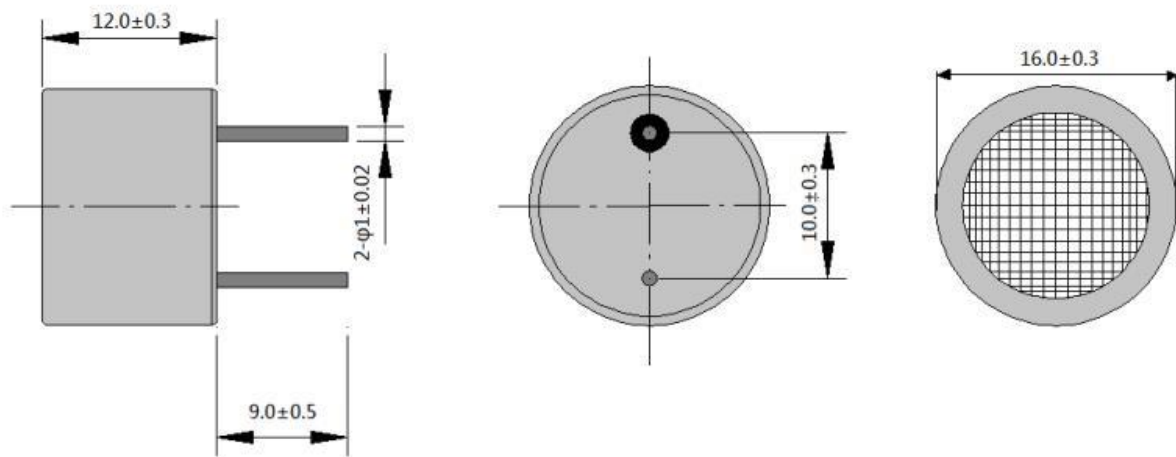

5 Beam Pattern



Product Specification

Model: ISTO-A1625H12R


RoHS

Revision: original version

Effective Date: 2016-08-16

Customer:


Page 3 of 6

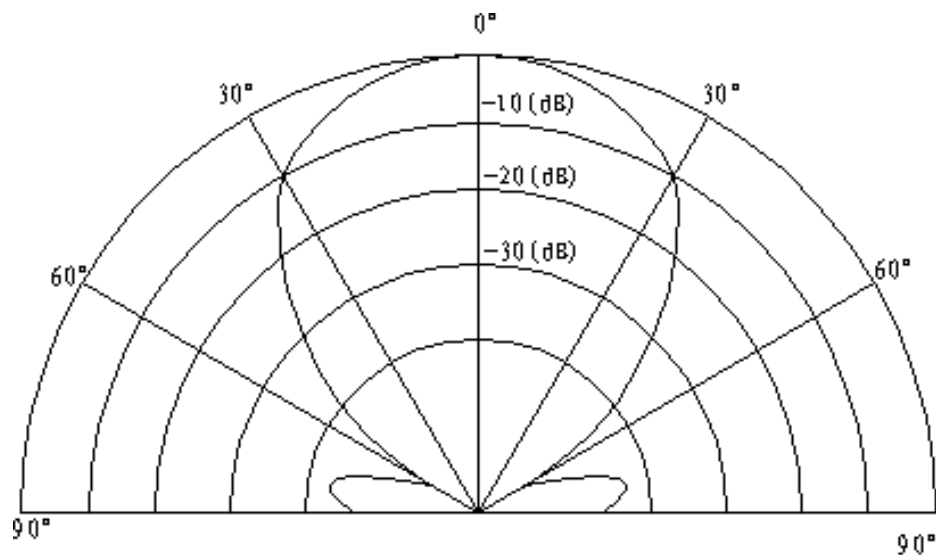

Directivity in Overall Sensitivity

6 Test Circuit

Receiver

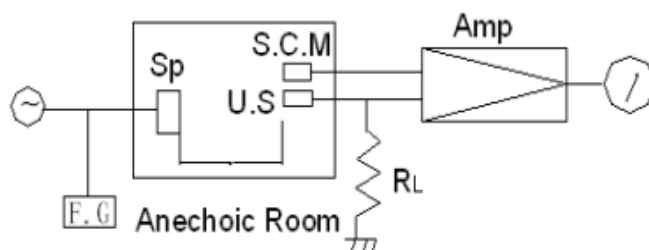

RL: 3.9K Ω

U.S :Ultrasonic Sensor

S.C.M:Standard Cappable Microphone

Amp. :Amplifier

OSC. :Oscillator

Sp :Tweeter

F.C :Frequency Counter



Product Specification

Model: ISTO-A1625H12R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 4 of 6

7 Reliability Test

- 7.1 High Temp. Life Test
 - Temperature $+85 \pm 3^{\circ}\text{C}$
 - Duration 100 hrs
- 7.2 Low Temp. Life Test
 - Temperature $-40 \pm 3^{\circ}\text{C}$
 - Duration 100 hrs
- 7.3 Heat Cycle Test
 - Temperature $+85 \pm 3^{\circ}\text{C}$ 1hour
 - $-40 \pm 3^{\circ}\text{C}$ 1hour
 - Cycles 10 cycles
- 7.4 Humidity Test
 - Temperature $+60 \pm 2^{\circ}\text{C}$
 - Relative Humidity 90~95%
 - Duration 100 hrs
- 7.5 Vibration Test
 - Vibration Frequency 10~55Hz
 - Sweep Period 1.5 min
 - Direction x,y&z
 - Time 2 hours/direction
- 7.6 Shock Test
 - Acceleration sine 100G
 - Direction x,y&z
 - Shock Time 3 times/direction
- 7.7 Drop Test
 - Height 1 m on concrete floor
 - Times 2 times
- 7.8 Connector Soldering Check:
 - Immersing terminal up to 1mm below in soldering bath at 260°C 10 Seconds.

Notice:

The variation of the sensitivity at 40KHz is within 2dB compared with initial figures at 25°C in 24 hours after above test conditions.

8 Caution in Use

- 8.1 Please avoid applying an excessive stress to the transducer because it might be damaged.



Product Specification

Model: ISTO-A1625H12R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 5 of 6

8.2 The transducer may generate surge voltage by mechanical or thermal shock. Care should be taken to protect from it in designing your application circuit.

8.3 Please do not apply DC voltage to the transducer.

8.4 Please do not use the transducer in water.

8.5 The piece of sensor may be damaged by force pressure from back of sensor.

8.6 Please well evaluate the painting and electrical characteristic for your coating.


8.7 When used to distinguish between positive and negative.

9 Note

9.1 Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.

9.2 You are requested not to use our product deviating from the agreed specifications.

9.3 We consider it not appropriate to include any terms and conditions with regard to the business transaction in the product specifications, drawings or other technical documents.

	<h1>Product Specification</h1>
Model: ISTO-A1625H12R	RoHS
Revision: original version	Effective Date: 2016-08-16
Customer:	Page 6 of 6

10 Packaging Details

